




The **MVS-5101 DS3-ASI Adapter** is a major component of a digital TV headend, receiving signals from the DS3/E3 network signal, transforming it into an ASI transport stream. It can also package the TS stream into the DS3 network.

Front Panel



Back Panel

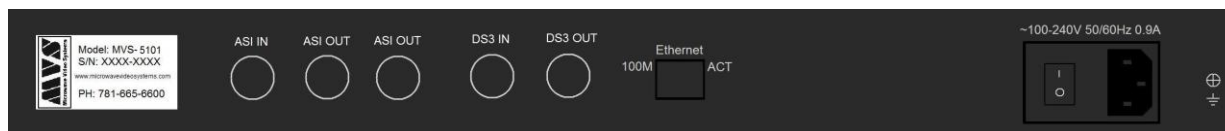

Features

- Full hardware implementation, high efficiency and stability
- Full duplex
- 8MB cache, anti-burst stream
- Real-time stream monitoring
- Local and remote control
- LCD user-friendly
- Highly reliable design for stable operation



Product Specifications	
Management	RJ45/Keyboard + LCD
ASI Input/Output	BNC 75Ω
DS3 Input/Output	BNC 75Ω
General Features	
Size	44mm x 482mm x 410mm 1.75" x 19" x 16"
Environment	0~50°C (operating); -25~55°C (storage)
Power	~100-240 VAC, 50/60 Hz, 25W

www.microwavevideosystems.com

Tel 781-665-6600 • 165C Tremont Street, Melrose, MA 02176 • Fax 781-665-9499

11/14/2011