




The **MVS-5107 ASI Decoder** can real-time monitor MPEG-2 TS stream and decode to AV signals. Decoders can be looped together to allow multiple TS streams to be decoded as when used with **MVS-1103 5-in-1 Encoder** making an idea solution for TV broadcast applications.

Front Panel



Back Panel

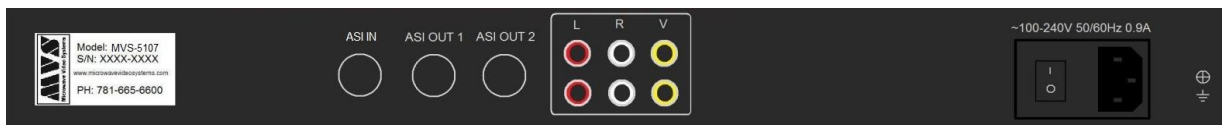

Features

- Compliant with MPEG-2 (MP@ML) standards
- Dual ASI Outputs
- CVBS video and stereo audio output
- User-friendly interface
- Supports OSD teletext, 256 color OSD
- Front panel LCD



Product Specifications		
Input Interface		ASI BNC 75 Ohm
Input Bit Rate		Max: 60 Mbps
Output Interface	ASI	2 ASI output, cascade MPEG-2 TS
	Analog AV Format	NTSC, PAL, 2 AV/RCA
General Features	Size	44mm x 482mm x 240mm 1.75" x 19" x 9.5"
	Environment	0~50° (operating); -25~55°C (storage)
	Power	~100-240 VAC, 50/60 Hz, 25W

www.microwavevideosystems.com

Tel 781-665-6600 • 165C Tremont Street, Melrose, MA 02176 • Fax 781-665-9499

12/14/2011